


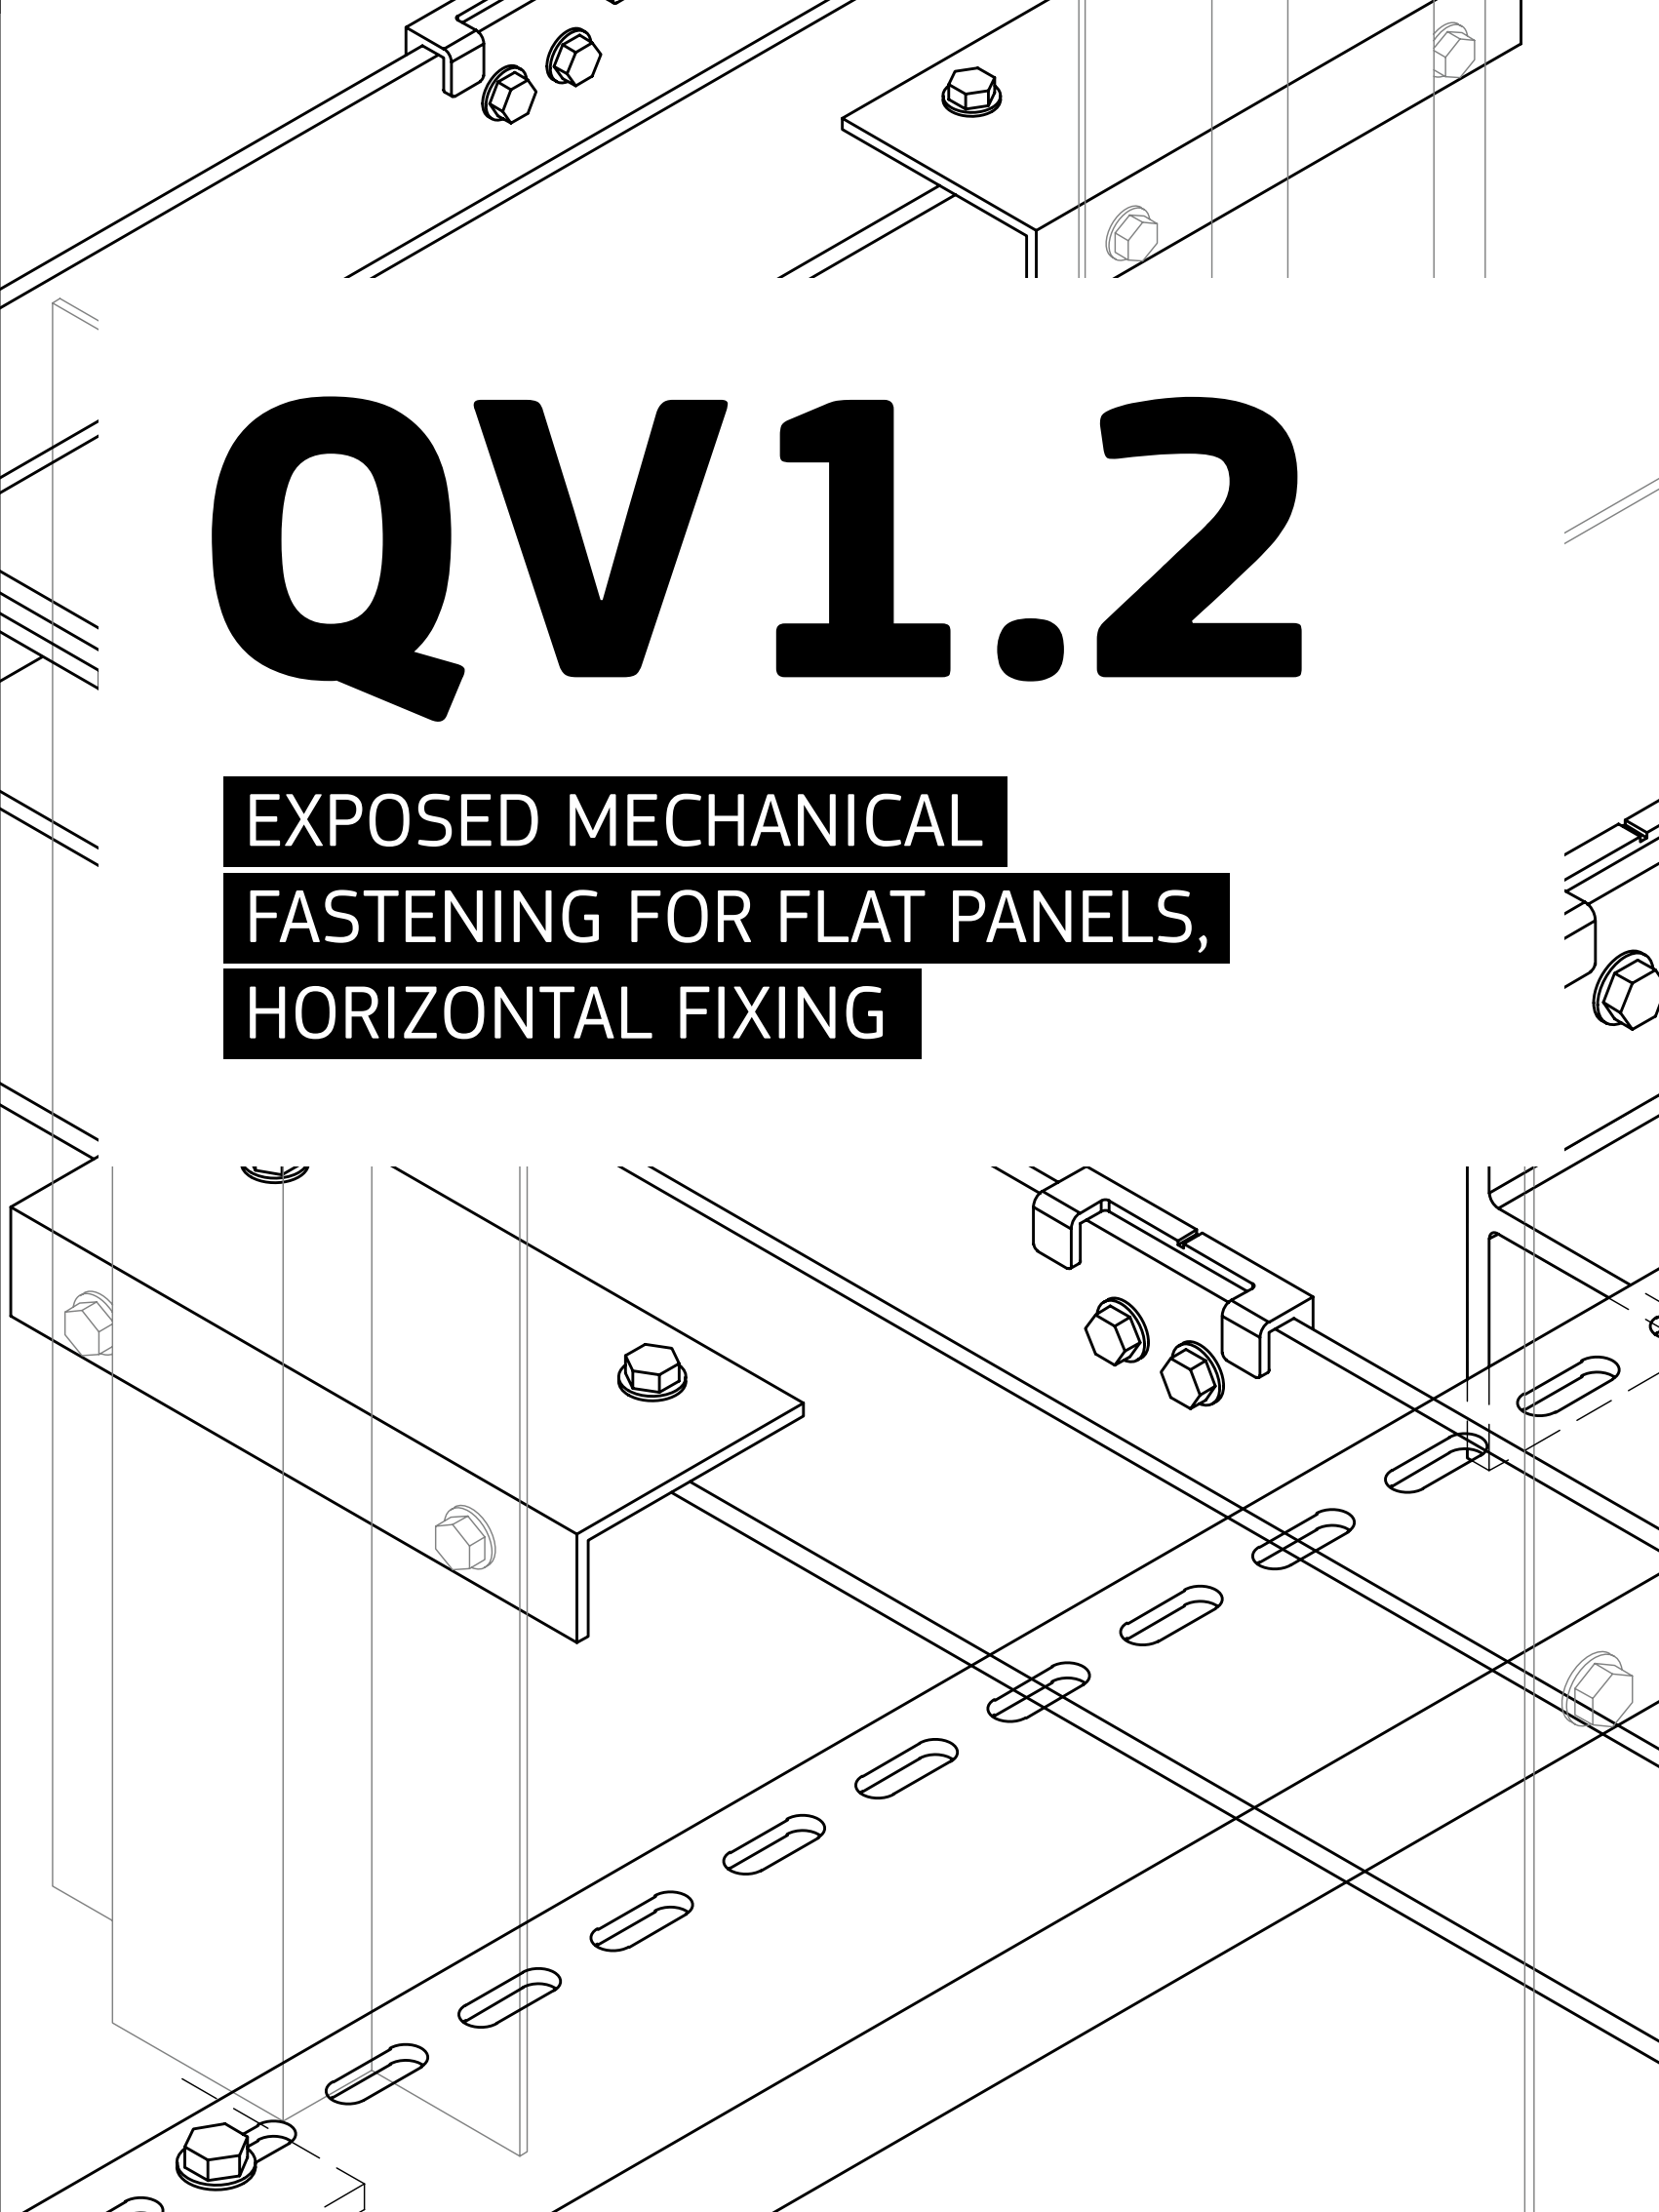


QV1.2

EXPOSED MECHANICAL
FASTENING FOR FLAT PANELS,
HORIZONTAL FIXING

Horizontal T brackets

AW 6063 T66

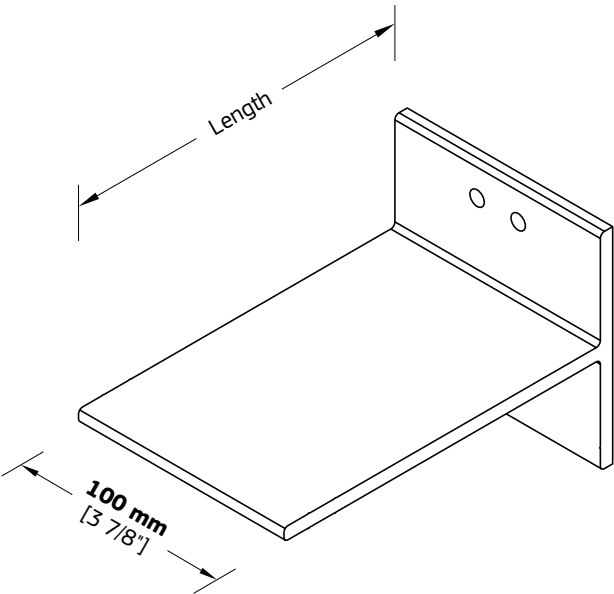


Options

Bracket-to-wall connection	Item No.
○ ○ ○ ○ Holes for Ø6.3 [1/4" dia.] fastener as standard; suitable for stud walls	02.2.length.100.63
○ ○ Hole for M10 [3/8" dia.] fastener; suitable for concrete/masonry walls	02.2.length.100.10

Bracket with Thermo-pad


Material:
Polypropylene
Thickness:
5 mm [3/16"]
Item No:
05.60.100

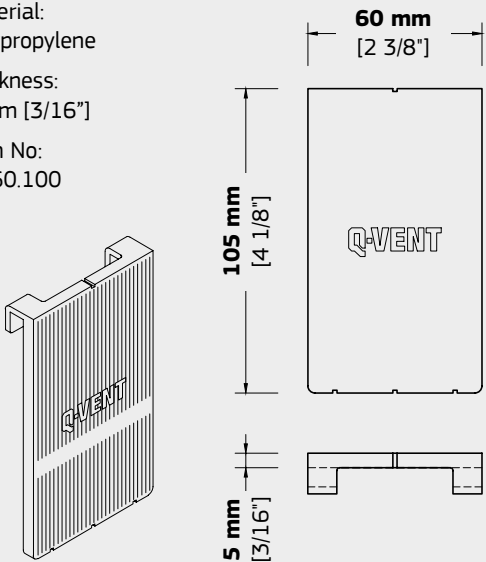



 Length	 Item No.	 Weight/pc	 Package pcs
70 mm [2 3/4"]	02.2.70.100.63	222 g [0.503 lb]	
85 mm [3 7/8"]	02.2.85.100.63	242 g [0.524 lb]	
160 mm [6 5/16"]	02.2.160.100.63	411 g [0.929 lb]	

Horizontal L brackets

AW 6063 T66

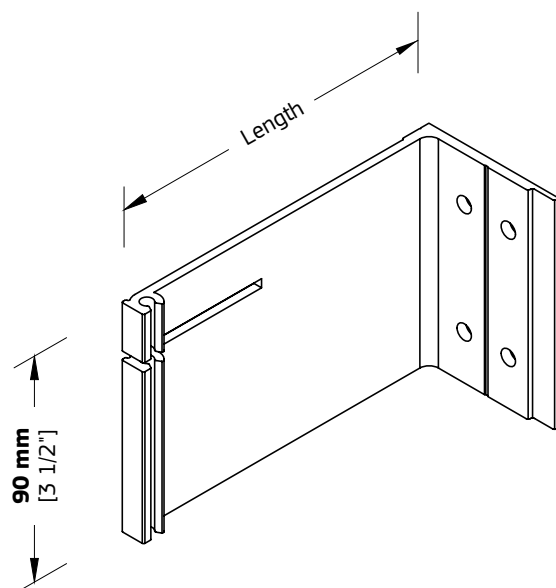

Options

Bracket-to-wall connection	Item No.
 Holes for ø6.3 [1/4" dia.] fastener as standard; suitable for stud walls	02.3.length.90.63
 Holes for M10 [3/8" dia.] fastener suitable for concrete/ masonry wall	02.3.length.90.10



For the profile-to-bracket connection use A2 (304) self-drilling screws $\varnothing 4.8 \times 32$ mm [#10-16 x 1 1/2" HWN], supplied by customer



Bracket with Thermo-pad

Brackets can be ordered with pre-installed thermo-pads

Material:
Polypropylene

Thickness:
5 mm [3/16"]

Item No:
02.length.70.fastenerT
(e.g. 02.100.70.10T)

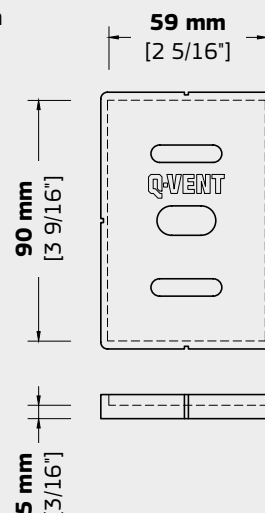


 Length	 Item No.	 Weight/pc	 Package pcs
60 mm [2 3/8"]	02.3.60.90.63	95 g [0.215 lb]	
90 mm [3 9/16"]	02.3.90.90.63	125 g [0.282 lb]	
140 mm [5 1/2"]	02.3.140.90.63	180 g [0.407 lb]	

QV1.2 | T PROFILES SUITABLE FOR HORIZONTAL FIXING

Q-VENT

AW 6063 T66
Unpainted, 6000 mm [20'] long,
and without slotted holes as standard

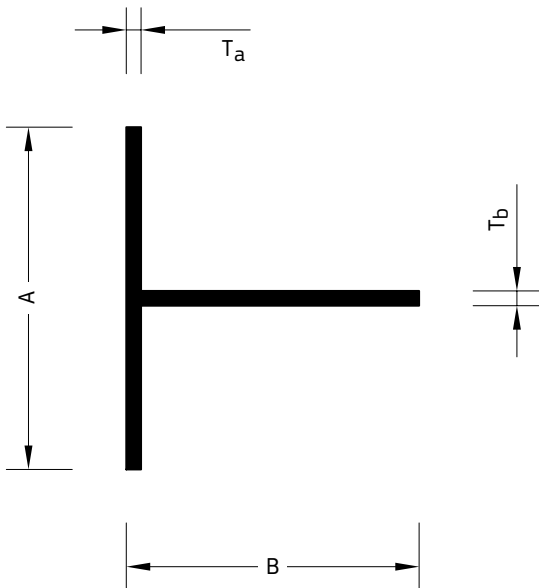

Options

Finish	Item No.
Unpainted or mf as standard	01.2.dimensions.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.2.dimensions.lenghtP
Anodized E6/C35 (black) 12 µm	01.2.dimensions.lenghtE




Special RAL colours and other Qualicoat classes, as well as anodized thicknesses and finishes, upon request

 Dimensions A x B x Ta x Tb	 Item No.	 Weight	 Packaging / pcs
100 x 70 x 5 x 5 mm [3.937" x 2.756" x 0.197" x 0.197"]	01.2.100705.6000	2 224 g/m [1.532 lb/ft]	
100 x 85 x 5 x 5 mm [3.937" x 3.346" x 0.197" x 0.197"]	01.2.100855.6000	2 418 g/m [1.625 lb/ft]	
100 x 160 x 6 x 6 mm [3.937" x 6.299" x 0.236" x 0.236"]	01.2.1001606.6000	4 096 g/m [2.862 lb/ft]	

QV1.2 | L PROFILES SUITABLE FOR HORIZONTAL FIXING

Q-VENT

AW 6063 T66
Unpainted, 6000 mm [20'] long,
and without slotted holes as standard

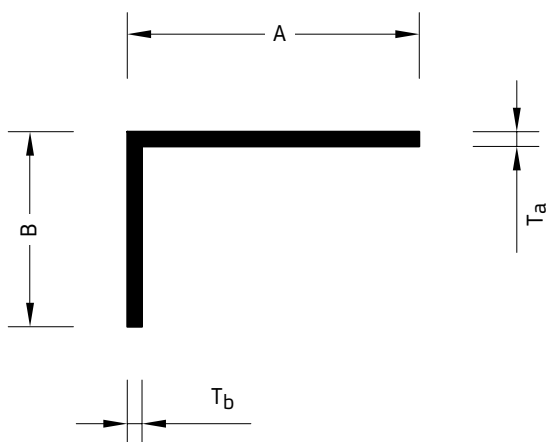

Options

Finish	Item No.
Unpainted or mf as standard	01.1.dimensions.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.1.dimensions.lenghtP
Anodized E6/C35 (black) 12 µm	01.1.dimensions.lenghtE


Profiles can be ordered with pre-fabricated slotted holes, upon request



Special RAL colours and other Qualicoat classes, as well as anodized thicknesses and finishes, upon request


 Dimensions A x B x T _a x T _b	 Item No.	 Weight	 Packaging / pcs
42 x 25 x 3 x 3 mm [1.654" x 0.984" x 0.118" x 0.118"]	01.1.42253.6000	517 g/m [0.357 lb/ft]	
60 x 25 x 3 x 3 mm [2.362" x 0.984" x 0.118" x 0.118"]	01.1.60253.6000	662 g/m [0.458 lb/ft]	
80 x 25 x 3 x 3 mm [3.150" x 0.984" x 0.118" x 0.118"]	01.1.80253.6000	826 g/m [0.569 lb/ft]	
80 x 40 x 4 x 4 mm [3.150" x 1.575" x 0.157" x 0.157"]	01.1.80404.6000	1 245 g/m [0.837 lb/ft]	
100 x 50 x 3 x 3 mm [3.937" x 1.969" x 0.118" x 0.118"]	01.1.100503.6000	1 191 g/m [0.820 lb/ft]	
150 x 70 x 6 x 6 mm [5.910" x 2.758" x 0.236" x 0.236"]	01.1.150706.6000	3 467 g/m [2.392 lb/ft]	

AW 6063 T66
Unpainted, 6000 mm [20'] long,
and without slotted holes as standard

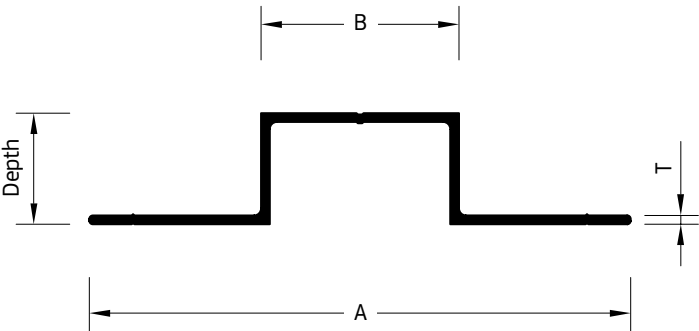


Options

Finish	Item No.
Unpainted or mf as standard	01.5.dimensions-1.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.5.dimensions-1.lenght P
Anodized E6/C35 (black) 12 µm	01.5.dimensions-1.lenght E
Profiles can be ordered with pre-fabricated slotted holes	Slotted holes for ø6.3 [1/4" dia.] fastener



01.5.depth-1.**631**.lenght
(e.g. 01.5.25-1.631.6000)



01.5.depth-1.**632**.lenght
(e.g. 01.5.25-1.632.6000)




Special RAL colours and other Qualicoat classes,
as well as anodized thicknesses and finishes,
upon request

 Dimensions D x A x B x T	 Item No.	 Weight	 Packaging / pcs
16 x 124 x 41 x 2 mm [0.630" x 4.882" x 1.614" x 0.079"]	01.5.16-1.6000	824 g/m [0.569 lb/ft]	
20 x 120 x 70 x 3 mm [0.787" x 4.724" x 2.756" x 0.118"]	01.5.20-1.6000	1 243 g/m [0.858 lb/ft]	
20 x 120 x 60 x 2 mm [0.788" x 4.724" x 2.362" x 0.079"]	03.697.6000	829 g/m [0.571 lb/ft]	
25 x 124 x 41 x 2 mm [0.984" x 4.882" x 1.614" x 0.079"]	01.5.25-1.6000	926 g/m [0.639 lb/ft]	


 Dimensions D x A x B x T	 Item No.	 Weight	 Packaging / pcs
25 x 125 x 65 x 3 mm [0.984" x 4.921" x 2.559" x 0.118"]	01.5.25-2.6000	1 375 g/m [0.947 lb/ft]	
35 x 89 x 38 x 2 mm [1.378" x 3.504" x 1.496" x 0.079"]	01.5.35-1.6000	842 g/m [0.581 lb/ft]	
45 x 146 x 60 x 2.4 mm [1.772" x 5.748" x 2.362" x 0.094"]	01.5.45-1.6000	1 505 g/m [1.037 lb/ft]	
57 x 144 x 60 x 3 mm [2.244" x 5.669" x 2.362" x 0.118"]	01.5.57-1.6000	1 526 g/m [1.051 lb/ft]	
117 x 144 x 60 x 3 mm [4.606" x 5.669" x 2.362" x 0.118"]	01.5.117-1.6000	3 050 g/m [2.101 lb/ft]	
117 x 144 x 60 x 3 mm [4.606" x 5.669" x 2.362" x 0.118"]	01.5.117-2.6000	3 740 g/m [2.649 lb/ft]	

AW 6063 T66
Unpainted, 6000 mm [20'] long,
and without slotted holes as standard

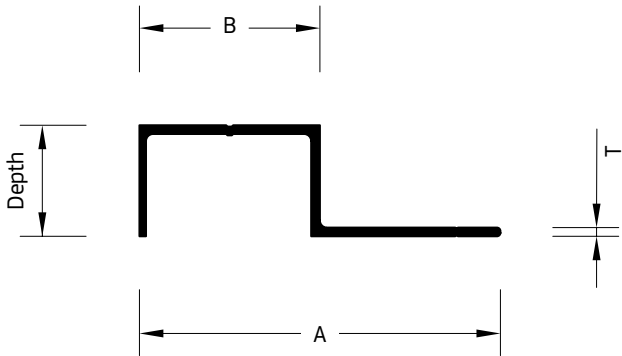

Options

Finish	Item No.
Unpainted or mf as standard	01.4.dimensions-1.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.4.dimensions-1.lenght P
Anodized E6/C35 (black) 12 µm	01.4.dimensions-1.lenght E
Profiles can be ordered with pre-fabricated slotted holes	01.4.dimensions-1. 631 .lenght (e.g. 01.4.25-1.631.6000)



Slotted holes for
ø6.3 [1/4" dia.] fastener




Special RAL colours and other Qualicoat classes,
as well as anodized thicknesses and finishes,
upon request

 Dimensions D x A x B x T	 Item No.	 Weight	 Packaging / pcs
25 x 82 x 41 x 2 mm [0.984" x 3.228" x 1.614" x 0.079"]	01.4.25-1.6000	671 g/m [0.461 lb/ft]	

QV1.2 | Z PROFILES

Q-VENT

AW 6063 T66
Unpainted, 6000 mm [20'] long as standard

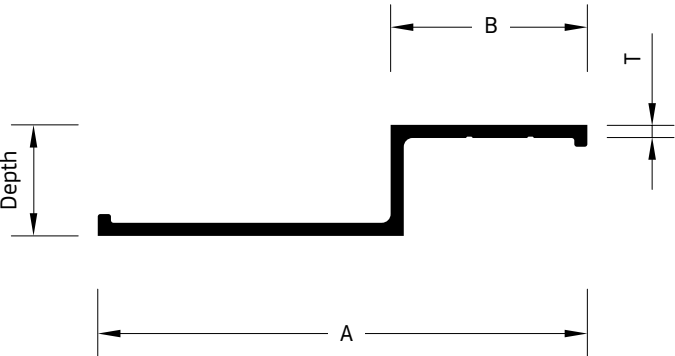

Options


Finish	Item No.
Unpainted or mf as standard	01.3.dimensions-1.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.3.dimensions-1.lenght P
Anodized E6/C35 (black) 12 µm	01.3.dimensions-1.lenght E



Special RAL colours and other Qualicoat classes, as well as anodized thicknesses and finishes, upon request

 Dimensions D x A x B x T	 Item No.	 Weight	 Packaging / pcs
19 x 70 x 25 x 3 mm [0.748" x 2.756" x 0.984" x 0.118"]	01.3.19-1.6000	700 g/m [0.482 lb/ft]	
25 x 112 x 70 x 3 mm [0.984" x 4.409" x 2.756" x 0.118"]	01.3.25-1.6000	1 123 g/m [0.774 lb/ft]	
25 x 70 x 25 x 2 mm [0.984" x 2.756" x 0.984" x 0.079"]	01.3.25-2.6000	500 g/m [0.344 lb/ft]	
36 x 80 x 28 x 3 mm [1.417" x 3.150" x 1.102" x 0.118"]	01.3.36-1.6000	910 g/m [0.626 lb/ft]	
54 x 98 x 50 x 2 mm [2.126" x 3.858" x 1.969" x 0.079"]	01.3.54-1.6000	811 g/m [0.558 lb/ft]	
57 x 112 x 70 x 2.4 mm [2.244" x 4.409" x 2.756" x 0.094"]	01.3.57-1.6000	1 039 g/m [0.715 lb/ft]	
117 x 112 x 70 x 3 mm [4.606" x 4.409" x 2.756" x 0.118"]	01.3.117-1.6000	1 865 g/m [1.285 lb/ft]	

AW 6063 T66
Unpainted, 6000 mm [20'] long,
and without slotted holes as standard

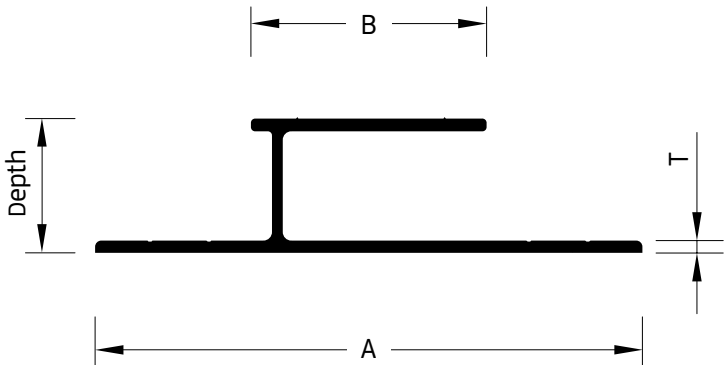

Options

Finish	Item No.
Unpainted or mf as standard	01.4.dimensions-1.lenght
Powder-coated in RAL 7021, Class 1 Qualicoat	01.4.dimensions-1.lenght P
Anodized E6/C35 (black) 12 µm	01.4.dimensions-1.lenght E



Special RAL colours and other Qualicoat classes,
as well as anodized thicknesses and finishes,
upon request

 Dimensions D x A x B x T	 Item No.	 Weight	 Packaging / pcs
32 x 130 x 56 x 3 mm [1.260" x 5.118" x 2.205" x 0.118"]	01.4.32-1.6000	1 682 g/m [1.159 lb/ft]	
50 x 100 x 26 x 3.5 mm [1.969" x 3.937" x 1.024" x 0.138"]	01.4.50-1.6000	1 570 g/m [1.082 lb/ft]	
117 x 130 x 56 x 3 mm [4.606" x 5.118" x 2.205" x 0.118"]	01.4.117-1.6000	2 476 g/m [1.705 lb/ft]	